


**CITATION**

# 7638-44T

**Sealed Aircraft Battery, VRLA, LT Technology, 24V, 44Ah**

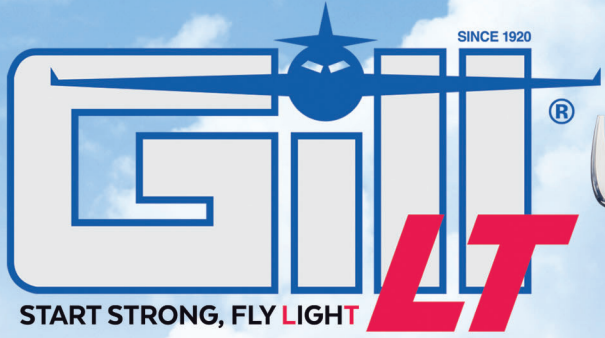

SPECIFICATIONS			
Model	7638-44T		
Nominal Voltage, V	24		
One Hour Capacity, C1, Ah	44		
30 Minute Emergency Rate, C/2, A	70		
Weight, Lb. Maximum	88.63		
Power Performance	23°C (75°F)	-18°C (0°F)	-30°C (-22°F)
Ipp, A	1857	1677	1411
Ipr, A	1247	1051	948



**7638-44T**  
AVAILABLE NOW,  
AT DISTRIBUTORS

*Upgrade to the Next Generation of Lead-Acid Technology!*

- ✓ TSO Authorized
- ✓ DO-160E Tested
- ✓ Sealed, VRLA, Non-Spillable
- ✓ 18 Month/1800 Hour Capacity Check Inspection
- ✓ Temperature Sensor Connector
- ✓ STC Kits included for New Installations
- ✓ 2 Year Warranty
- ✓ FAA-PMA
- ✓ EASA



**TELEDYNE BATTERY PRODUCTS**  
Everywhere you look™

909.793.3131



GILLBATTERIES.COM

Rev 2018/11/28

**CITATION**

# 7638-44T

AVAILABLE NOW AT DISTRIBUTORS

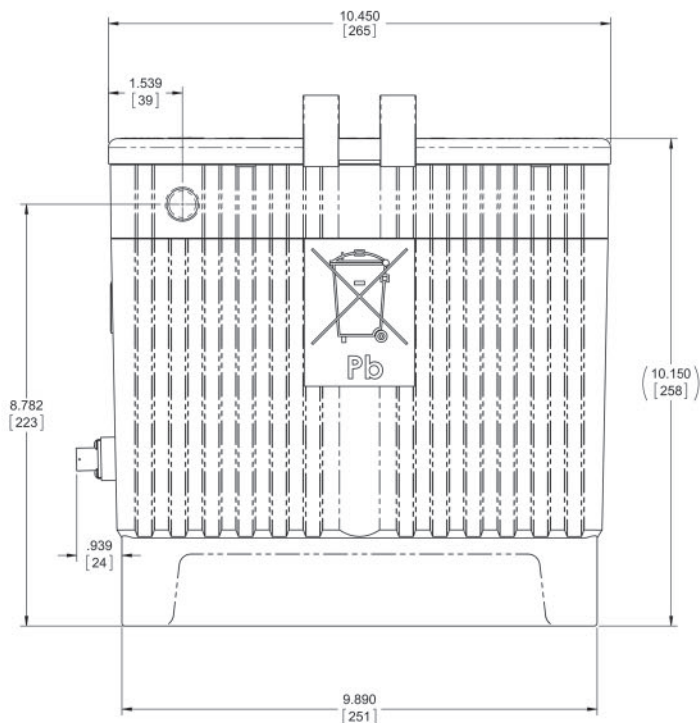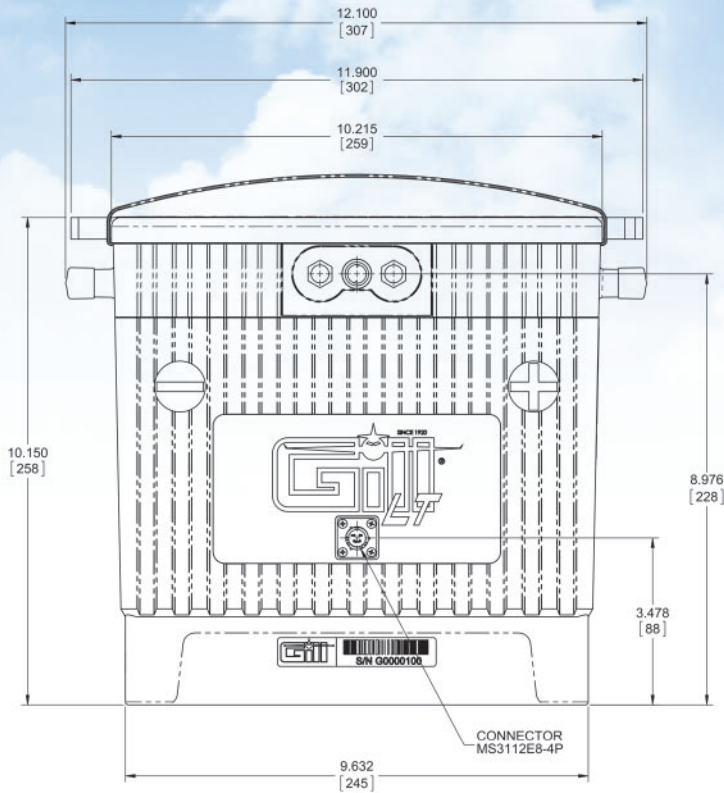

**FAA-PMA APPROVED**

MAKE	MODEL
Citation	525, 525A, 525B, 525C, 500, 501, 550, 551, S550, 560, 560XL, 650, 680

STC paper work only included in battery box.  
No aircraft modifications required for these models.



**TELEDYNE BATTERY PRODUCTS**  
Everywhere you look™

909.793.3131

GILLBATTERIES.COM

